

Seatech-charm



Seatech-bright



Seatech-interference




CARACTERÍSTICAS GENERALES TECHNICAL FILE	seatech charm	seatech bright	seatech polite	seatech interference
Composición Composition	90% Vinyl 10% Polyester	87% Vinyl 13% Polyester	85% Vinyl 15% Polyester	50% Vinyl 50% Polyester
Peso/Weight	600 g/m ²	630 g/m ²	710 g/m ²	830 g/m ²
Ancho/Width	140 cm ± 2%			
Longitud de las piezas Length of rolls	30 m	30 m	30 m	25m
Resistencia a la abrasión Abrasion resistance	300.000 ciclos/cycles	300.000 ciclos/cycles	300.000 ciclos/cycles	150.000 ciclos/cycles
Resistencia U.V. U.V. Resistance	1.300 horas/hours	1.000 horas/hours	1.000 horas/hours	1.000 horas/hours
Solidez a la luz Fastness to light	ISO 105 B02 7	ISO 105 B02 6	ISO 105 B02 4	ISO 105 B02 6
Resistencia a la tracción Breaking Resistance	ISO 13934-1 N/5 cm ≥ 170	ISO 13934-1 N/5 cm ≥ 150	ISO 13934-1 N/5 cm ≥ 150	ISO 13934-1 N/5 cm ≥ 150
Alargamiento a la rotura Breaking Elongation	ISO 13934-1			
	trama/weft urdimbre/warp			
	≥ 50% ≥ 25%			
Resistencia al desgarro Tear Resistance	ISO 13937-2	ISO 13937-2	UNE EN 53-326	ISO 13937-2
	trama/weft urdimbre/warp			
	≥ 50 N ≥ 35 N	≥ 40 N ≥ 25 N	3 KG 3 KG	≥ 50 N ≥ 35 N
Tratamiento ignífugo Fire Retardant treatment	UNE 1021 Parts 1-2 IMO MSC 307 (88) BS5852 Cigarette & Match			
Tratamiento antibacteriano/ antihongos Antibacterial Treatment/ Mildew Resistance	sí/YES			
Manutención Cleaning instructions	Utilizar jabón neutro / Use neutral soap			

SeaTech



INDOOR & OUTDOOR

TUVATextil

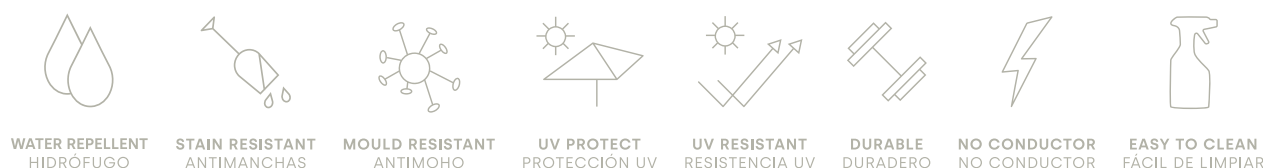

TUVATextil

M-ST01-102



TUVATextil

Tuvatextil, S.L.
Ctra. Pla de Sta. Maria s/n,
43817 - El Pont d'Armentera - SPAIN
Tel: +34 977 639 132
Fax: +34 977 639 268

info@tuvatextil.com
www.tuvatextil.com